




AirFlow™ 1 CBA 200C

400mL Cartridge Dispenser

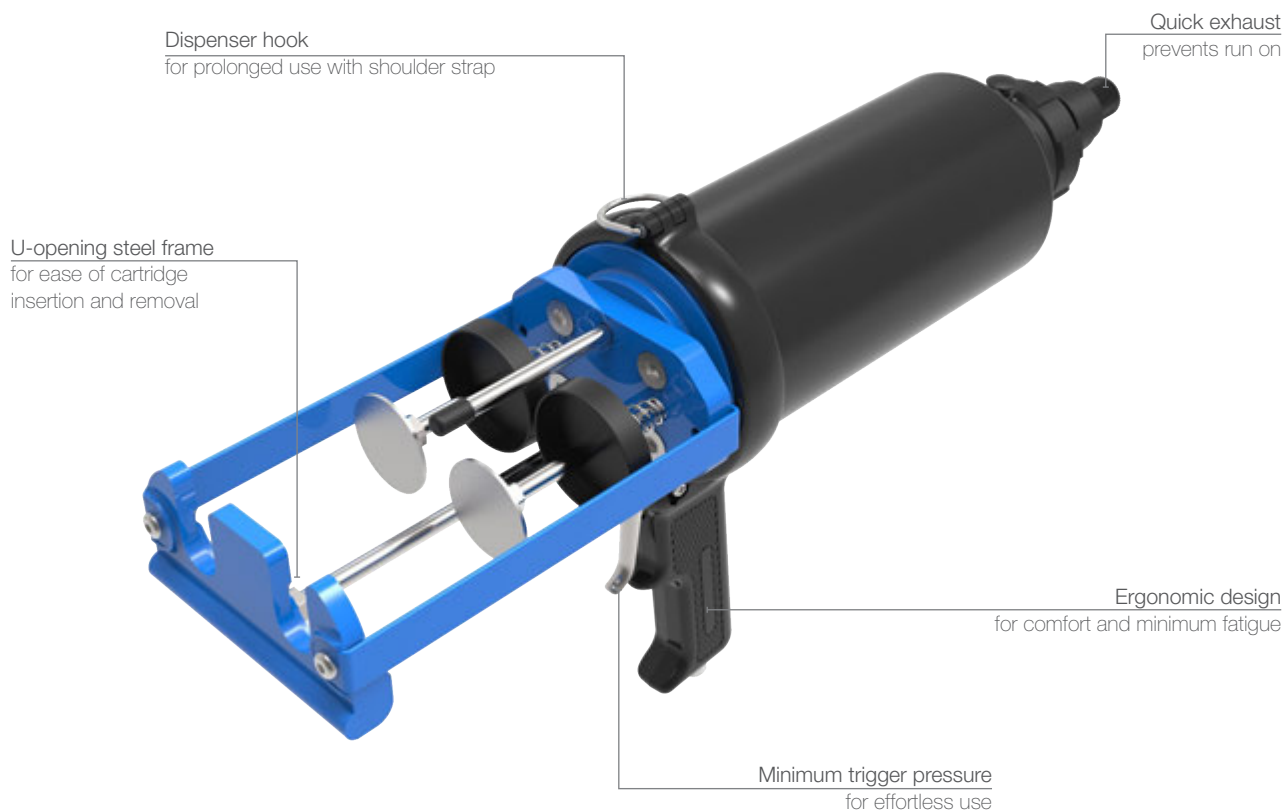

Model shown: AirFlow 1 CBA 200C 400mL

Features

- Air return as standard
- Minimum trigger pressure
- U-opening steel frame
- Quick exhaust valve
- Customization possible

Benefits

- Fast, accurate and effortless application
- For effortless use and minimum fatigue
- Ease of cartridge insertion and removal
- Prevents run-on
- Customer labelling

Applications



Bonding



Chemical
Anchoring

Product by range




The **AirFlow 1 CBA 200C** 2-component pneumatic dispenser offers air return as standard for fast, accurate and effortless application and minimum trigger pressure for effortless use.

Specifications

- Weight: 2.8kg / 6.2lbs
- Frame Length: 166mm / 6.5in
- Maximum Thrust: 5kN
- Maximum Pneumatic Pressure: 6.8bar / 100psi
- Air Consumption: 40 litres / min
- Handle Material: Aluminum
- Frame Material: Steel
- Tool Component Approvals: CE, REACH
- Cartridge Capacity: 400mL (14.1oz)
- Cartridge Ratio: 1:1
- Viscosity: Medium / High
- Standard Color: Black / Blue
- Customized versions on demand

Dimensions

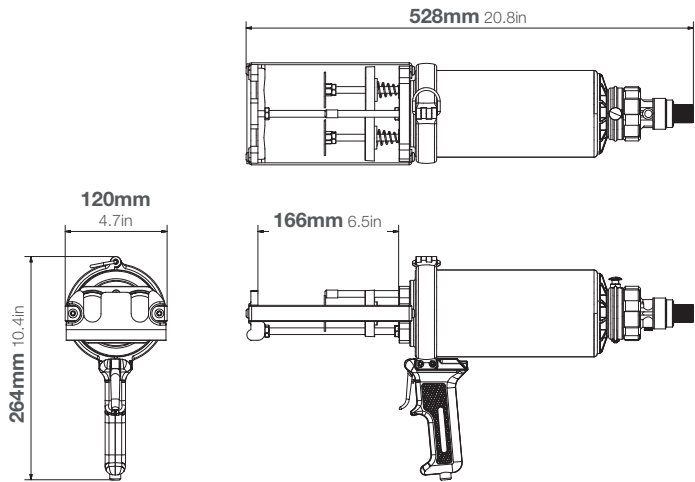

Part number:
DP2C 400-01-500-101


Article number:
177785 / CBA 200C (US)

Packaging:
1 per Box

Matching MIXPAC™ cartridges

-

Compatible cartridges



Aluminum Cartridge
400mL (2x200) / 1:1 AL

1:1	mm	inch
l	145.5	5.7
a	Ø49.0	Ø2.0

Conversion kits

-

Matching accessories

Connecting manifold supplied for 2x200mL cartridges on page 145.